


UniteID LLC

EnterpriseXR+

The EnterpriseXR+ will read both FDX-A (125kHz) and FDX-B (134.2kHz) and temperature sensing micro-transponders used either for Companion Animals or as Unique Device Identification (UDI) for medical implants. Transponder 134.2kHz test chip included. 2 year manufacturing defects warranty. Quick Start Guide included.

FDX-B Average Read Range **6 Inches**
(152.40mm) Vertical Orientation

FDX-A Average Read Range **2 Inches**
(50.8mm) Vertical Orientation

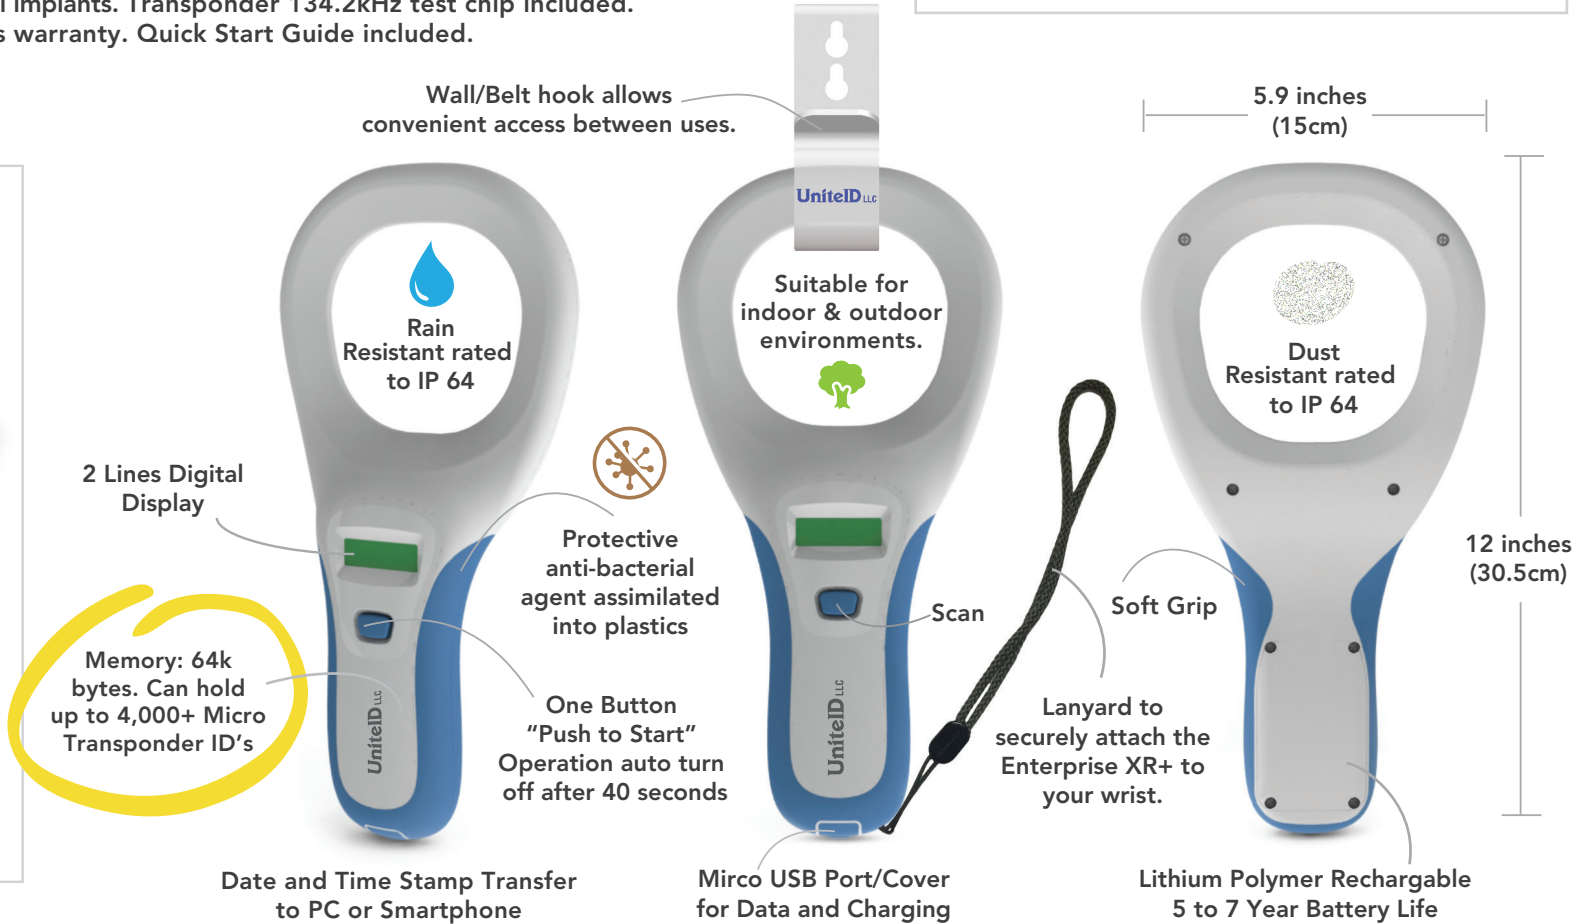

GPS Locator When Scanned Into any Smartphone.



Audio Confirmation for Each Chip Read



Apple Compliant, Android Compliant



0°C to 50°C Operating Temperature



12.4 ounces 352 Grams



Private Branding Encouraged

UniteID LLC

For cost inquiries, email: sales@unitedID.net • www.uniteid.net

34 Rundlett Hill Rd. Unit #1 • Bedford, NH 03110 • (603) 669-0800 • Fax: (866) 703-2192

IN COMPLIANCE WITH RoHS, FCC, IC AND ISO 11784 / 11785

DUST & RAIN RESISTANT RATED TO IP 64
CERTIFIED UL 94VO RATED FLAME RETARDANT